





Powerful Solutions

EagleEyes CCTV

SECURITY SOLUTIONS AND TECHNOLOGIES

Day&Night Zoom Camera 30X

- High Sensitive 1/4" Super HAD CCD
- Color 550 TV Lines at center / B/W 600TV Lines
- Min. Illumination : 0.004Lux / F1.6 (B/W Sens-up)
- Built in Auto Focus / Auto Iris
- OSD (On Screen Display)
- High Durability Built In 30X Optical Power Zoom
- 10X Digital Zoom (Total : 300x Zoom)
- True day/night (Filter switching mechanism built-in)
- 2~10X Variable Digital Zoom ranges
- SSNR Function (Super Noise Reduction)
- PELCO-D Protocol included
- RS-485 Supported
- Wired Remote Controller(1.5m, 35m as optional)

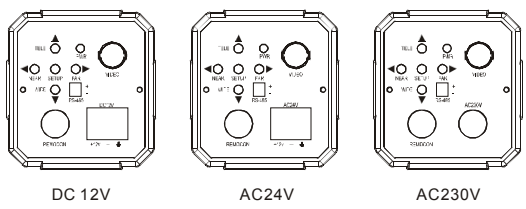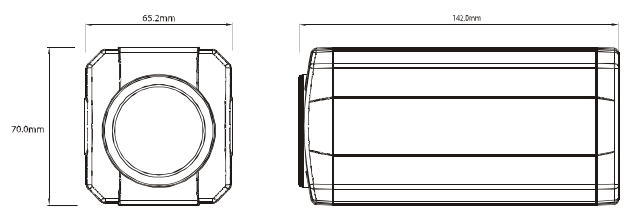

1/3 SONY DSP Super HAD CCD	COLOR	X30 Optical Power Zoom lens	Day & Night	Super Noise Reduction
Sens-up 0.004Lux	Auto / IRIS	Electronic shutter	DC 12V	

MODEL	EE-Z30W	
Input Voltage	DC 12V/24VAC	
Power Consumption	4.8W at 12V	
CCD Size	1/4inch, Interline Transfer CCDSONY	
Total Pixels	811(H) x 508(V)	795 (H) x 596 (V)
Effective Pixels	768(H) x 494(V)	752 (H) x 582 (V)
Optics	30X, f=3.3 to 99.0mm(F 1.6 to 3.4)	
Min. Focus Distance	1000mm	
D. Zoom	Off / On (Limit 10x)	
Angle Field of view	H : Appr. 58.0°(Wide end)to2.22°(Tele) / V:Appr. 44.8°(Wide) to 1.68°(Tele)	
Scanning System	2:1 Interlace	
Synchronization	Internal / Line-Lock	
Frequency	H:15.734KHz/V:59.94Hz	H:15.625KHz/V:50.00Hz
Resolution	550TV Lines(Min.):Color / 600TV Lines(Min.):B/W	
Min. Illumination	0.3Lux(Color) / 0.08Lux(B/W) / 0.004(Sens-up) : F1.6	
S/N (Y signal)	50dB (AGC Off, Weight On)	
Video Output	CVBS : 1.0Vp-p / 75Ω	
Focus	Auto / Manual / One-Push	
Zoom Movement Speed	5.2 Sec : Wide to Tele	5.4 Sec : Wide to Tele
IRIS Control	Auto / Manual	
Lens Initialize	Built-in	
Camera Title	On / Off (Displayed 20 characters)	
Camera ID	255 ID Selectable	
Day & Night	Auto / Color / BW(ICR)	
Gain Control / BLC	Low / Middle / High / Off Selectable	
White Balance	ATW(Indoor(3,000K-6,500K), Outdoor(1,800K-10,500K)) / AWC / Manual	
Electronic shutter speed	Auto / Manual / A.FLK (X128~1/60sec~1/20,000sec)	Auto / Manual / A.FLK (X128~1/50sec~1/20,000sec)
O. S. D	Built-In	
Motion Detection	On/Off (output via communication)	
Control output	Pelco-D (2400,4800,9600,19200,38400,57600bps)	
SSNR	Low / Middle / High / Off Selectable	
Privacy Function	On/Off (32 Zones, 4 Programmable Zones per Screen)	
FLIP,MIRROR,Image stabilizer	On / Off	
Preset	8 Positions (Stored with Internal EEPROM)	
Operating Temperature/Humidity	-10°C to +50°C / 20% to 80% RH	
Storage Temperature/Humidity	-20°C to +60°C / 20% to 95% RH	
Dimensions (W x H x D)	65.2 x 70 x 142	
Weight	560g	



Av. República Argentina, 50 • 15° andar
 Curitiba PR 80240-210
 Tel: (041) 3342 1600 • Fax: (041) 3244 2200
 vendas@eaglevision.com.br
 www.eaglevision.com.br