





Powerful Solutions

EagleEyes CCTV

SECURITY SOLUTIONS AND TECHNOLOGIES

1 Channel Passive Coax/UTP Transceiver

- Twisted Pair Transceiver Component
- Gauge cable AWG24, AWG22, AWG18, AWG16
- BNC Plug to RJ45 or 2 screw terminal
- Video transmission
- Video signal noise ratio at 60dB
- Transient Protection
- Internal impedance coupling device
- Internal noise filter Video I/P: 1V p-p 75ohm

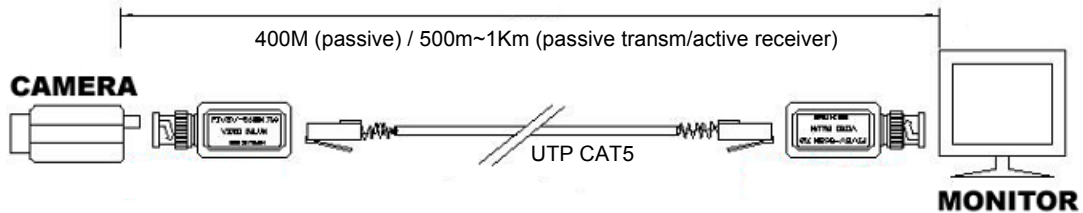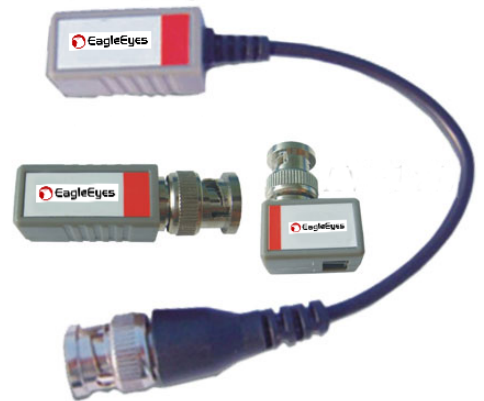

Environment	Close-Circuit TV (CCTV) equipment for security and surveillance.
Normal Output Level	BNC: 1Vp-p/ 75Ω - UTP: 100Ω
Impedance	100+/-20 ohms .
Video Format	NTSC/PAL/CCIR/SECAM
Differential Capacitance:	62pF/m max
Weighted Signal-noise-ratio	60dB
Network Wiring	One Unshielded Twisted Pair 24-16 AWG (0.5-1.31mm)
Common/Differential mode rejection	15KHZ-6MHz: 60 db typ.
Max. Distance Color (passive)	Cat 3 – (150m); Cat 5 – (300m); Cat 6 – (400m)
Max. Distance Color (passive transmitter / active receiver)	Cat 5 – (600m to 1Km)
Connectors	1 BNC (video) to main RJ45 / Pigtail or "L" shape option
Temperature	Operating: -40° to 75° C. Storage:-25° to 80° C. Humidity: up to 95%
Enclosure	ABS fire retardant plastic
Weight	45g
Dimensions	Length 55mm x Width 25mm x Height 25mm