



Powerful Solutions


# EagleEyes CCTV

SECURITY SOLUTIONS AND TECHNOLOGIES

## Mobile LCD Monitor 10.4" Vandal-Proof

EE-LCD104VP

LCD Mobile Monitor	EE-LCD104VP
LCD Panel	Display Type : 10.4" SVGA TFT LCD
	Resolution : 800 × 600
	Max.color : 262K
	Luminance : 230 cd/m2
	View Angel : 130°(H) , 110°(V)
	Pixel Pitch : 0.264 x 0.264 mm
	Contrast Ratio : 400 : 1
	Response Time : 25 ms
	Power Consumption : 8.3 W
	LCD MTBF : 50,000hrs
Signal input	VGA ( 15 pin D-sub connector )+ DVI ( DVI-D connector ) + audio input ( audio jack )
Protect glass	3 mm strengthen glass (Vandal-Proof)
Speaker	Built-in 2x stereo speakers(2w)
OSD	Brightness, Contrast, H/V Position, Color, Backlight, Phase, Clock, auto tune and recall
Touch Screen ( optional )	Internal USB, RJ45 ethernet or RS-232 interface controller
	Type: Analog resistive type : 25VDC ≥ 20MΩ
	Resolution: continuous
	Light transmission: 80% or more
	Power consumption:<5V @1mA
	Surface hardness : 3H
	Operating force : ≤100g
Life expectancy : 35 Million	
Operation system : Window 2000, XP, CE, DOS , Linux	
Signal connectivity ( optional )	AV input ( S-Video ,RCA ,BNC )
DC power input ( optional )	Wide range DC 7V-28V input (43~100V VCC optional)
Power Supply	Input: 100~240VAC,50/60Hz
	Output: DC12V@ 4A /48W ,external ac adapter
Construction	Heavy duty steel and aluminum front panel
Environment	Operating temperature: 0 °C to 50 °C
	Storage temperature: -20 °C to 60 °C
	Storage humidity: 10% to 90%non-condensing
	Vibration: 17 to 500HZ 1G PTP
	Shock Anti-Vibration: 1G /peak( 11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D ( mm )	285 x 235 x 50.8
Weight ( kgs )	Net : 3.2 Gross: 5.2

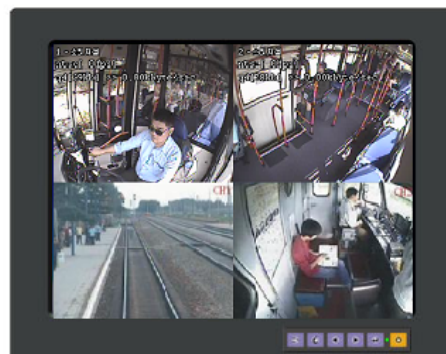

### OTHER OPTIONS



6" Heavy Duty



8.5" Heavy Duty