




Powerful Solutions

EagleEyes CCTV

SECURITY SOLUTIONS AND TECHNOLOGIES

8/16 Output 12VDC or 24VAC 2U 19" Power Supply

- 8 or 16 individually fuse protected outputs
- Power switch with circuit breaker
- 110/220VAC Input and 12VDC or 24VAC output
- Input and output surge suppression
- 1.3 to 1.8 amp output per channel
- Maintains camera synchronization
- Standard, 2U EIA 19" rack mount chassis
- Removable face plate for easy serviceability
- Removable terminal strips for field wiring
- Removable 3 wire grounded AC line cord
- Input and output fuse protected
- Manual switch ON/OFF for each output (Optional)
- Limited lifetime warranty

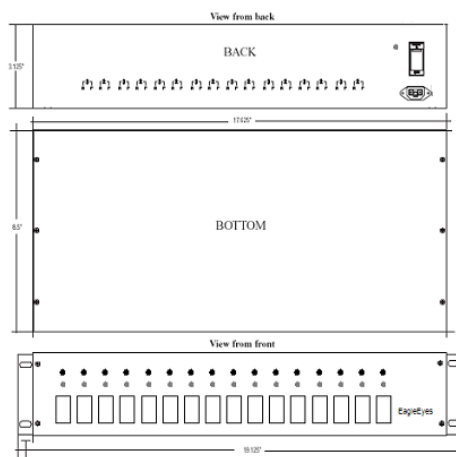

SPECIFICATIONS

Input Specifications:

- Input voltage: 120/220 VAC
- Input voltage frequency: 60 Hz
- Input current: 3.5 A

Output Specifications:

- Output voltage: 12~15VDC or 24VAC
- Total output current: 10 or 15A (8 ports) / 10 or 20A (16 ports)
- Outputs: 8 or 16, fuse protected
- Power limited @ 1.6A

Temperature Ratings:

- Operating temperature: 0 °C to 49 °C
- Humidity: 85% @ 30 °C
- BTU/hr: 34

MODELS 12VDC:

- EE-1612F10 (16 ports, 12VDC, 10A)
- EE-1612F20 (16 ports, 12VDC, 20A)
- EE-0812F10 (08 ports, 12VDC, 10A)
- EE-0812F15 (08 ports, 12VDC, 15A)

MODELS 24VAC:

- EE-1624F10 (16 ports, 24VAC, 10A)
- EE-1624F20 (16 ports, 24VAC, 20A)
- EE-0824F10 (08 ports, 24VAC, 10A)
- EE-0824F15 (08 ports, 24VAC, 15A)

MECHANICAL

- 2U rack mount chassis: 3.25" H x 19.125" W x 10" D
- 16 gauge galvanized steel



Av. República Argentina, 50 • 15º andar
 Curitiba PR 80240-210
 Tel: (041) 3342 1600 • Fax: (041) 3244 2200
 vendas@eaglevision.com.br • www.eaglevision.com.br