



Powerful Solutions




EagleEyes CCTV

SECURITY SOLUTIONS AND TECHNOLOGIES

1 Channel Passive Video/Power/Data Transceiver

- Built in a highly balanced mode of video transmission for extra interference immunity (Good for DVRs)
- Gauge cable CAT5 AWG24 and AWG22
- BNC Plug to RJ45 or 2 screw terminal
- 1 Channel Video, Power and Data Transceiver
- Video signal noise ratio at 60dB
- Internal noise filter Video I/P: 1V p-p 75ohm
- No power required to power up transceiver

EE-P111VPD-RJ45 (RJ45 female connector)
EE-P111VPD-2P (2 Pins terminal connectors)

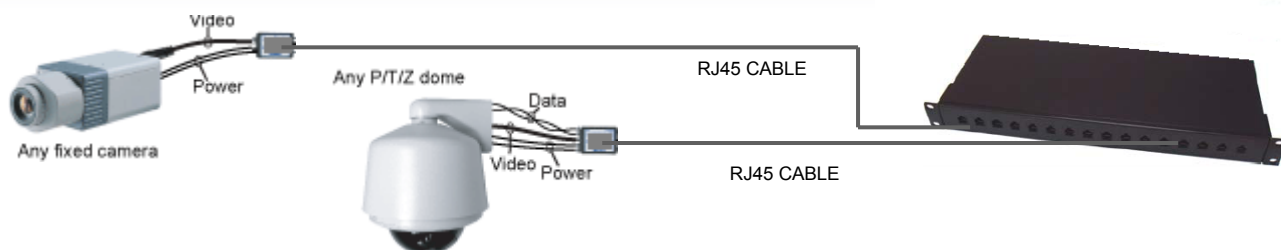

Environment	Close-Circuit TV (CCTV) equipment for security and surveillance.
Normal Output Level	1Vp-p/ 75Ω
Bandwidth	Video: DC to 6 MHz.
Differential Gain	<2%
Differential Capacitance	19 pF/ft max (62pF/m max)
Weighted Signal-noise-ratio	60dB
Insertion Loss	Less than 1.5 dB per pair over the frequency range from DC to 6 MHz
Max. Distance Color	Cat 3 –492 ft (180m); Cat 5 – 738 ft (280m)
Max. Distance Black & White	Cat 3 –1246 ft (400m); Cat 5 – 1804 ft (600m)
Connectors	RJ45 or Two (2) screw terminals for twisted pair
Temperature	Operating: -25° to 70° C. Storage:-25° to 85° C. Humidity: up to 95%
Enclosure	ABS fire retardant plastic IP65
Weight	35g
Dimensions	Length 63mm x Width 23mm x Height 19mm



Av. República Argentina, 50 • 15° andar
Curitiba PR 80240-210
Tel: (041) 3342 1600 • Fax: (041) 3244 2200
vendas@eaglevision.com.br • www.eaglevision.com.br

