



Powerful Solutions


# EagleEyes CCTV

## SECURITY SOLUTIONS AND TECHNOLOGIES

### 16 CH Active UTP Video Receiver

- 16 Channels Twisted Pair RX Component
- 2 x 16 BNC Plug to CAT-5 RJ45 or 2Pin Connector
- ACTIVE Video RECEIVER Rackmount 19 1U
- Video Range UP TO 1500 METERS
- Internal impedance coupling device
- Strong anti-interference
- Control: Class 6 gain, luminance controllable
- Surge protection built in

EE-A1610RJ

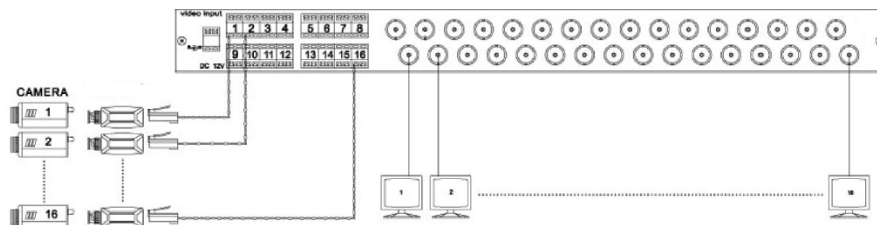

Characteristics	It can be integrated with EE-AV1302T Series active transmitter to receive the color video signals 1500m Away, and 250m~1Km away when using the EE-AV11PV/12VP/113VPP passive transmitter
Control	16 dip switch set to control distance
Video input and output	4 RJ45 connector to 16 BNC Main and 16 BNC Loop
Power Supply	110V OR 220V Switch
Cable	Unshielded Twisted Pair 24-16 AWG (0.5-1.31mm)
Normal Output Level	1Vp-p/75• TV signal
Bandwidth	DC~15KHZ~6MHz
Surge Protection	6000V 1.2u S* 50uS
Video Control	Adjustable brightness and sharpness
Resistance	Unbalanced termination 75Ω Balanced
Video Format	NTSC/PAL/CCIR/SECAM
termination	100Ω
Weighted Signal-noise-ratio	60dB
Power consumption	0.5w
Operation Temperature Range	(-)20°C~(+)70°C
Operating Humidity Range	95%(Non-condensing)
Dimensions	430x160x44 mm



Av. República Argentina, 50 • 15º andar  
 Curitiba PR 80240-210  
 Tel: (041) 3342 1600 • Fax: (041) 3244 2200  
 vendas@eaglevision.com.br • www.eaglevision.com.br

