



Powerful Solutions

EagleEyes CCTV

SECURITY SOLUTIONS AND TECHNOLOGIES



Day/Night Dome 480 Lines Vandal-Proof

- Day & Night 1/3" SONY Super HAD CCD (DSP Sony)
- High Resolution up to 480 TV Lines (Color mode)
- Low Lux at 0.01 F1.2 (BW Mode) / 0.0 Lux (IR On)
- Varifocal lens Auto-Iris DC 4-9mm (2.8-12mm optional)
- 3D Axis bracket integrated
- Water proof IP66
- Other Functions: BLC, AWB, AGC, IP66 NEMA4X



Wall Mount Optional

- 3-AXIS GIMBAL 360° / 100° BRACKET

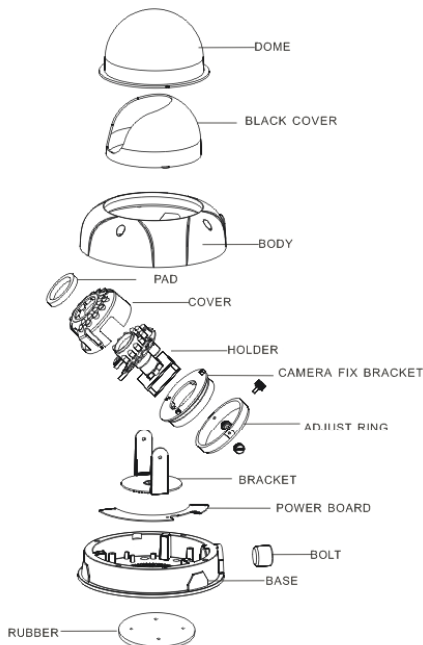

Technical Specs	EE-D48PCD-VPX
<i>Pick up Element</i>	1/3" Day & Night Sony Super HAD CCD
<i>DSP chipset</i>	Sony
<i>Infrared Illuminator (24LEDs)</i>	Optional (EE-D48PCD-VP-IR)
<i>Number of Pixels</i>	NTSC: 768x494 Total pixels / 768x494 Effective pixels
<i>Horizontal Frequency</i>	NTSC: 15.734 KHz
<i>Vertical Frequency</i>	NTSC: 60Hz
<i>Synchronism</i>	Internal / Line-Lock
<i>Resolution</i>	480 TV Lines (Color) / 520 TV Lines (BW mode)
<i>Scanning System</i>	2:1 Interlace
<i>Auto Electronic Shutter</i>	ESL, manual, Flickerless - 1/60~1/120,000 sec.
<i>Auto White Balance</i>	Automatic (2000K~1000K)
<i>Back Light Compensation</i>	DIP Switch ON/OFF
<i>Automatic Gain Control</i>	DIP Switch ON/OFF (0~42dB)
<i>Signal Noise Ratio</i>	>50dB
<i>Minimum Illumination</i>	0.1 Lux at F1.2 (Day) / 0.01 Lux (Night) / 0.0 Lux IR ON
<i>Protection</i>	IP66 NEMA4X Water-proof / Vandal-proof poly carbonate cover
<i>Power supply</i>	DC 12V (12VDC/24VAC dual voltage optional)
<i>Lens and Mount</i>	Varifocal AUTO-IRIS DC 4-9mm (2.8~12m optional)
<i>Power Consumption & LED</i>	355mA / Power LED indicator
<i>Operating Environment</i>	(-)30 ~ (+)60
<i>Dimension</i>	100(H) x 145(W) (mm)
<i>Weight</i>	DC Version: 620g / DC/AC Version: 910g



Av. República Argentina, 50 • 15º andar
 Curitiba PR 80240-210
 Tel: (041) 3342 1600 • Fax: (041) 3244 2200
 vendas@eaglevision.com.br • www.eaglevision.com.br

