



Powerful Solutions

# EagleEyes CCTV

## SECURITY SOLUTIONS AND TECHNOLOGIES

### Camera Controller Explosion-Proof

- Explosion-Proof Camera Control Certificate Exd I BT6 CNEx
- Stainless Steel 304 and 316L / IP68 Protection
- Control Pan/Tilt/Zoom and Wiper of up to 4 or 8 cameras
- NTSC/PAL Auto Detect
- Standalone unit or surface mount
- Support 4/8 video input and 4/8 video output
- PelcoD protocol integrated

#### Product Parameters:

Ex-proof Mark: Exd II CT6 (H<sub>2</sub>) / DIP A21 TA, T6

Materials: 304/316L

Net Weight: 12.5kg

Operating Power: AC127V, 50Hz

Power Input: 30VA

Range of Temperature: 0°C~+40°C

Atmosphere Pressure: 80~106kPa

Relative Humidity: ≤95%(+25°C)

Communication Signals: One road RS485, Baud Rate: 2400 bps



Communicating Protocol: PELCO-D

Video Input: 4/8 roads, standard video signals of 75Ω

Video Output: One road 4/8-split screen, NTSC/PAL standard video signals

Installing Method: Place on platform

Outer Dimensions: 300(L)×170(W)×256(H) (mm)

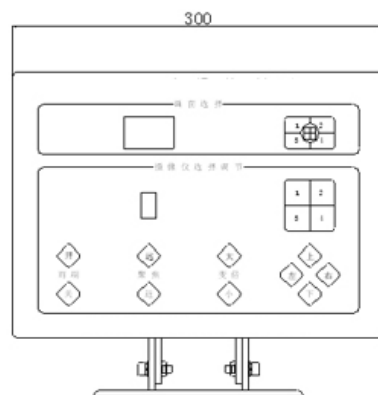

#### Models:

EE-KBEX316 (316L SS)

EE-KBEX304 (304 SS)



Av. República Argentina, 50 • 15° andar  
Curitiba PR 80240-210  
Tel: (041) 3342 1600 • Fax: (041) 3244 2200  
vendas@eaglevision.com.br • www.eaglevision.com.br

